
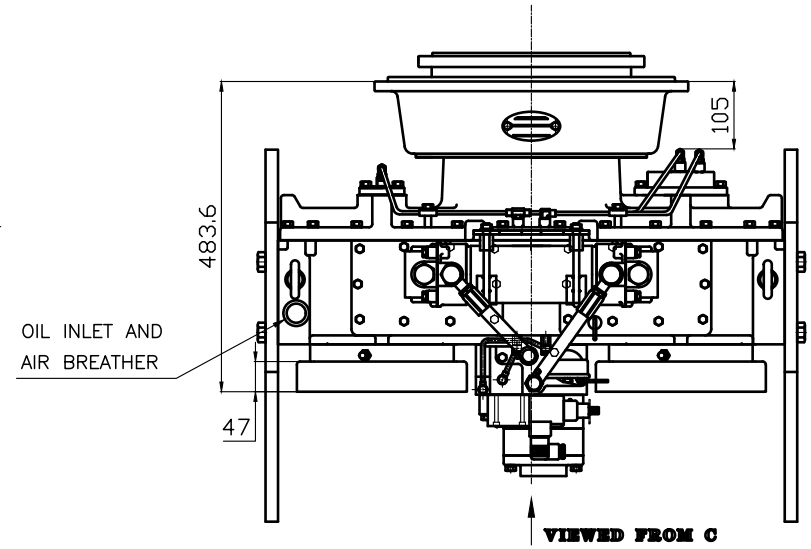


REV. NO.	SYMBOL	DESCRIPTION	POSITION	REVISION NO.	DATE	BY	CHK	APP'D




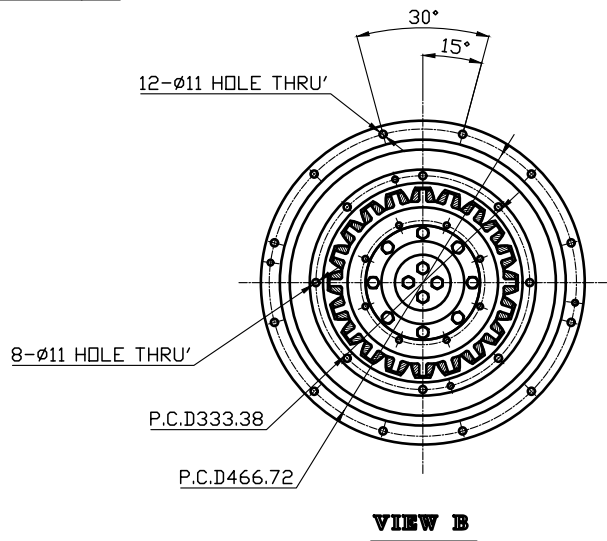


DPO 410 HYDRAULIC POWER TAKE OFF SPECIFICATION

GEAR RATIO	0.66:1, 0.76:1, 0.86:1, 0.98:1(동축)	
TOTAL WEIGHT	APPROX. 420 kg(DRY)	
OIL CAPACITY	APPROX. 7 L	
OIL VISCOSITY	SAE # 30	
OIL PRESSURE	1.56 ~ 2.45 MPa	CLUTCH OIL
DIRECTION OF ROTATION	INPUT	THE SAME DIRECTION AS ENGINE ROTATION
	OUTPUT	DIRECTION OPPOSITE TO ENGINE ROTATION
OIL CHANGE INTERVAL	THE FIRST 100HOURS OF INITIAL OPERATION AND EVERY 1000HOURS THEREAFTER	
SHIFTING LIMIT	UNDER 50% OF THE RATED ENGINE SPEED	
OIL COOLER	WATER FLOW 40 ~ 60L/min	TEMPERATURE OF COOLING WATER MAX 32°C

ROTATION DIRECTION BY MODEL (VIEWED FROM C)

MODEL	INPUT (ENGINE)	OUTPUT LEFT (PTO)	OUTPUT RIGHT (PTO)
DPO-F410	(RIGHT)	(LEFT)	(LEFT)
DPO-R410	(LEFT)	(RIGHT)	(RIGHT)

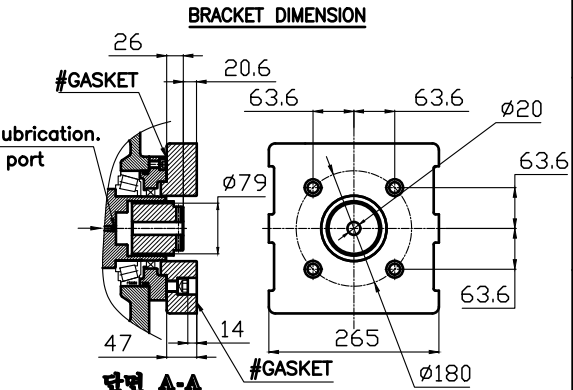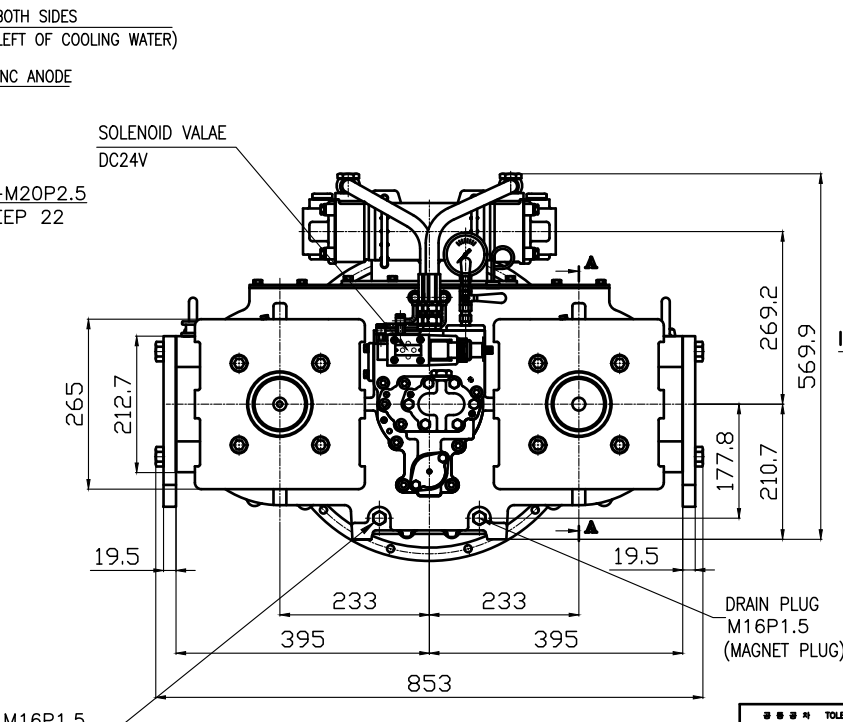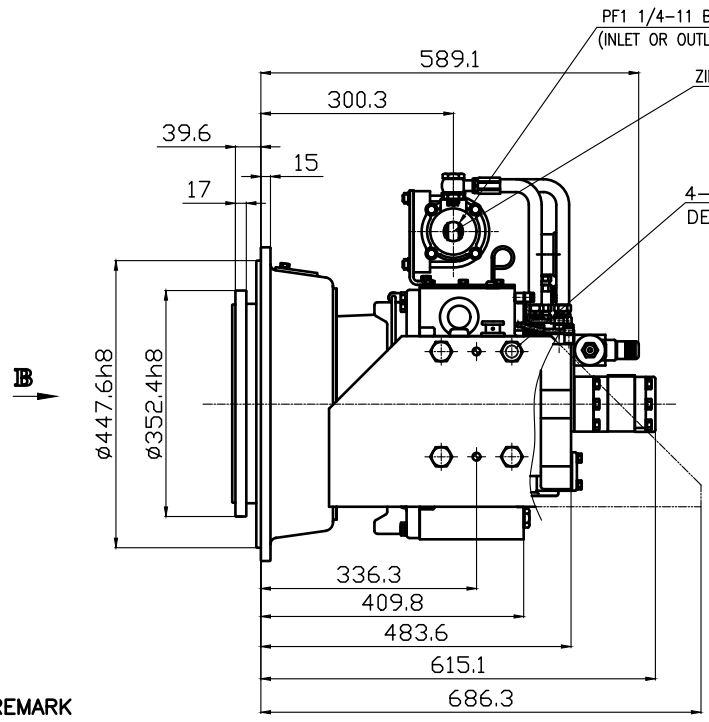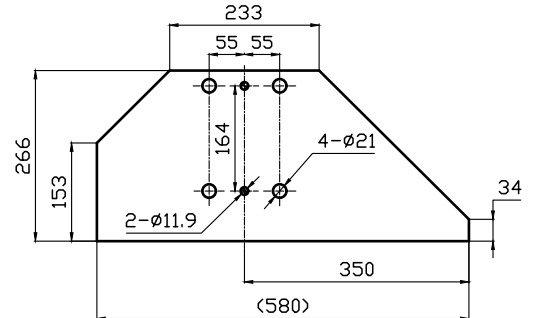

Must check the leakage of oil when operating because the pump assembled part is designed with force-lubrication.

- REMARK
- 1.HOUSING: SAE#2
 - 2.DRIVING RING: SAE 11.5"
 3. SIZE OF PUMP FLANGE MAY BE CHANGED DEPENDING ON PUMP SPEC.

TOLERANCE ON		REV. NO.	PART NO.	PART NAME	QTY	MATERIAL	SIZE	REMARKS
FRACTIONS	DECIMALS	ANGLES	주기 1 합조		TYPE	DPO-F(R)410		
1/16	0.0625	0.5	DATE	SCALE	TYPE	PTO INSTALLATION DRAWING		
1/32	0.03125	0.25	2013.02.06	1/1	NAME	T410F(R)A~DH2G		
1/64	0.015625	0.125	APPROVED BY	CHECKED BY	DESIGNED	DWG. NO.		
3/128	0.0078125	0.0625						
1/256	0.00390625	0.03125						
1/512	0.001953125	0.015625						
1/1024	0.0009765625	0.0078125						

D-I INDUSTRIAL SIZE A CODE ID. NO.